


ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

WITH AN ADDED **HEALTH LOCK TIMER**, THIS **COOLER'S** INNOVATIVE DESIGN MAKE IT **IDEAL FOR MICROMARKET LOCATIONS.**

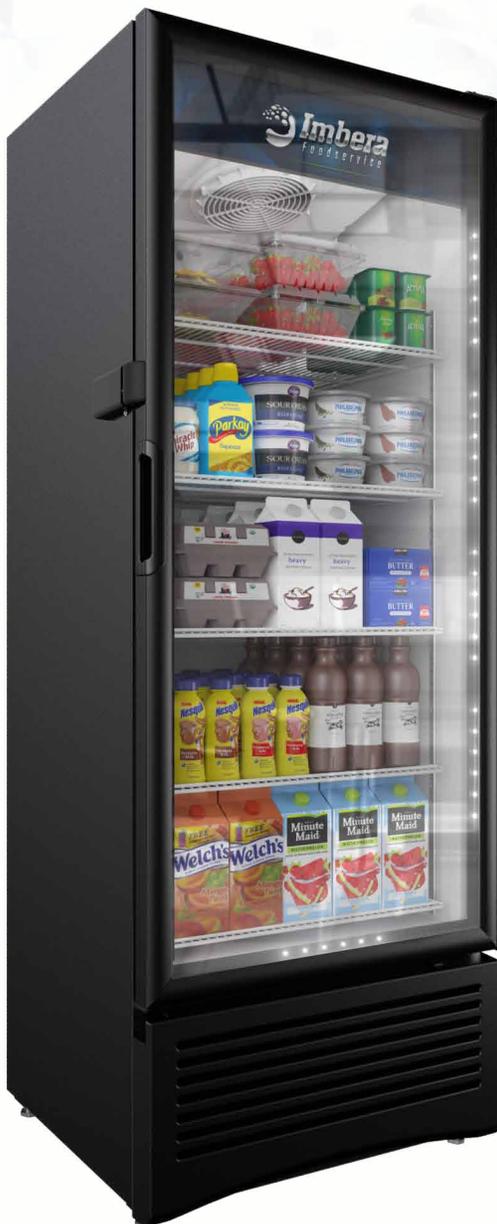

KEY FEATURES

- **Low maintenance high performance System**

Ensures rapid and effective cabinet cooling and maintains a consistent temperature range with minimum energy consumption.

- **Electronic Temperature Controller**

Assures the optimal performance of the cooler, delivering the ideal product temperature ideal for consumption.

- **High Efficiency Glass Door**

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

- **LED Lighting System**

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

- **CFC and HFC Free Cyclopentane Foam**

Eco-friendly, recyclable and high efficiency cabinet insulation.

- **Electronic Fan Motors**


Enhances performance and efficiency. Uses only a fraction of the energy compared to the industry standard shaded-pole motor. Longer lifespan.

- **Low Maintenance Condenser**


Imbera's finless condenser is designed to minimize maintenance, drastically reducing the Total Cost of Ownership. Prevents dust from blocking air flow, to saving energy and extending the life of the compressor.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.


PRODUCT VIEWS



TOP VIEW

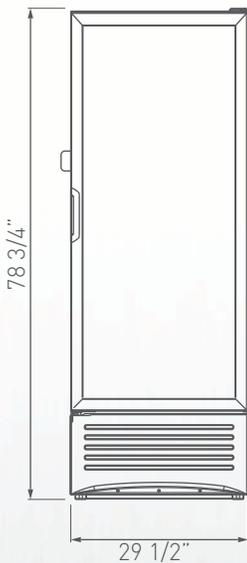

FRONT VIEW

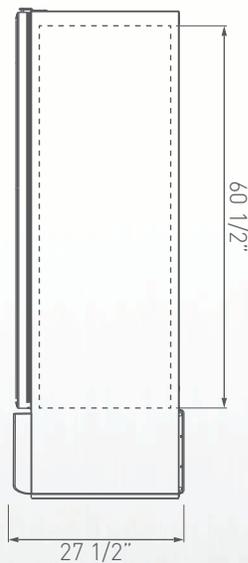

SIDE VIEW

TECHNICAL SPECIFICATIONS

Exterior Dimensions	W:	29 1/2"	750 mm
	D:	27 1/2"	700 mm
	H:	78 3/4"	2000 mm

Exterior Dimensions (w/lock)	W:	30 5/8"	777 mm
	D:	27 1/2"	700 mm
	H:	78 3/4"	2000 mm

Interior Dimensions	W:	25 1/2"	649 mm
	D:	21 3/8"	542 mm
	H:	60 1/2"	1536 mm

Dimensions w/packaging	W:	32 1/4"	820 mm
	D:	29 7/8"	760 mm
	H:	82 5/8"	2100 mm

Shelf Size	W:	24 3/4"	630 mm
	D:	19 5/8"	497 mm

Weight	223.8 Lbs	101.5 kg
Weight w/packaging	240.4 Lbs	109.1 kg

Shelves	5
----------------	---

Capacity 20oz.	Flat:	240
	Gravity:	240

REFRIGERATION DATA

Energy Consumption	3.040 kWh/day
---------------------------	---------------

Voltage	115/60
----------------	--------

Horse Power	1/4+
--------------------	------

AMPS	5.2
-------------	-----

LOGISTIC

Trailer Loads	40':	42
	53':	60

Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓
	NAMA:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

HEALTH TIMER ENSURES THE COOLER WILL **LOCK** IF CONSUMPTION TEMPERATURE REMAINS **ABOVE 41.9°F** FOR LONGER THAN **15 MINUTES**.

KEY FEATURES

• Triteq Fresh IQ lock

- Designed and manufactured by Imbera and Triteq, leaders in intelligent freezers and vending security solutions.
- Compatible with any Triteq or P1 key and AutoTraq

• Primary functions and capability

- Automatically locks when consumer protection is required.
- Automatically locks when a temperature probe failure is detected.
- Automatically locks within 2 minutes of AC power loss, and remains locked if power is not restored before a Temp lock-out event. After AC power is restored, device will automatically unlock if Temp Lock-out did not occur.
- Can be locked and unlocked independently of health timer.
- Tamperproof electronic key for safety.
- Alerts for lock activity.

• Health lock

- Prevents from dispensing food that is not at a safe temperature.
- Health timer ensures that lock will be engaged if temperature remains above 0.4°F for longer than 15 minutes.

• Certifications,

- UL ✓
- NAMA ✓

An easy access, hidden test switch is provided for compliance with Health Department inspection procedures.

